


Number of contacts

9-37

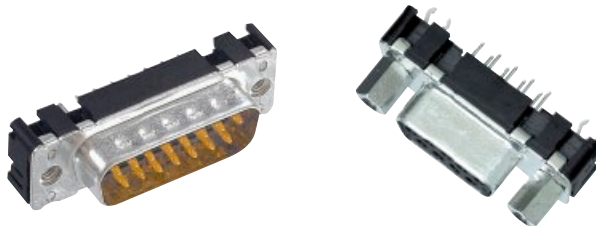

SMC stamped solder pins, straight with/without grounding board locks

D-Sub

Identification	No. of contacts	Part No.			
Performance levels Explanations see page 05.178 Other performance levels on request		Performance level 3		Performance level 2	
Male connector metal shell with dimples					
Without grounding board locks	9 15 25 37	09 65 129 770 . 09 65 229 770 . 09 65 329 770 . 09 65 429 770 .		09 65 129 670 . 09 65 229 670 . 09 65 329 670 . 09 65 429 670 .	
With grounding board locks	9 15 25 37	09 65 169 771 . 09 65 269 771 . 09 65 369 771 . 09 65 469 771 .		09 65 169 671 . 09 65 269 671 . 09 65 369 671 . 09 65 469 671 .	
Female connector metal shell					
Without grounding board locks	9 15 25 37	09 66 115 750 . 09 66 215 750 . 09 66 315 750 . 09 66 415 750 .		09 66 115 650 . 09 66 215 650 . 09 66 315 650 . 09 66 415 650 .	
With grounding board locks	9 15 25 37	09 66 155 751 . 09 66 255 751 . 09 66 355 751 . 09 66 455 751 .		09 66 155 651 . 09 66 255 651 . 09 66 355 651 . 09 66 455 651 .	
Please insert digit for flange thread or fitted female screw locks					
M3 ▶ 1					
4-40 UNC ▶ 2					
fitted screw locks 4-40 UNC ▶ 3 ¹⁾					

¹⁾ Fitted screw locks 4-40 UNC not normally kept in stock for performance level 3
 Connector dimensions see page 05.181. Mating conditions see page 05.178.