





**△ SPECIFICATION**  
 Current Rating:3 Amp  
 Withstanding Voltage:500V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Contact:Brass,Gold Flash Over Nickel  
 Insulator:PBT(UL94V-0),Black  
 RoHS Compliant

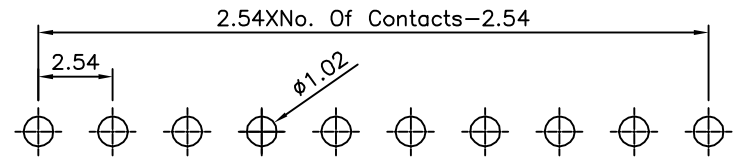

**△ Recommended P.C.B. Layout(Top View)**  
 (PCB Board Tolerance±0.05)

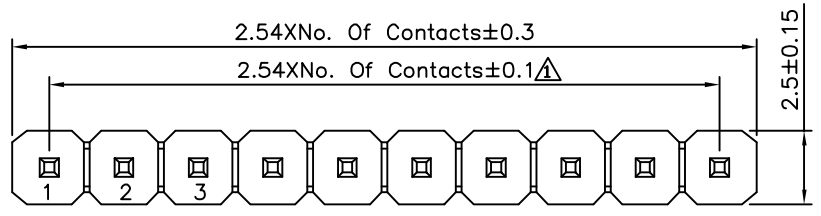

**△**

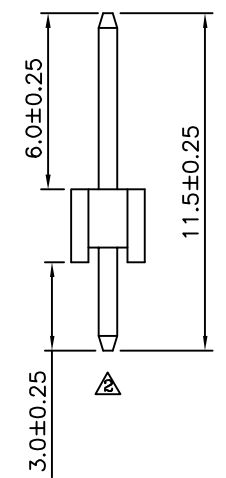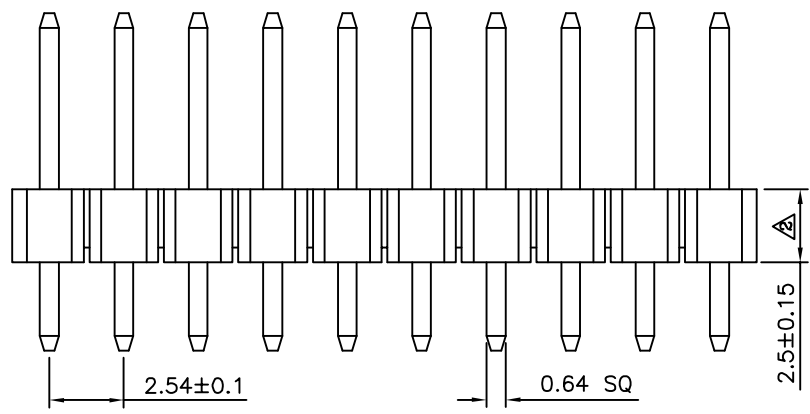

- $\frac{H}{(1)} \frac{D}{(2)} \frac{1}{(3)} X \frac{XX}{(4)} - \frac{H}{(5)}$
- (1) H:2.54mm Pin Header
  - (2) D:DIP Straight
  - (3) 1:Single Row
  - (4) XX:No. Of Position/Per Row
  - (5) H:RoHS Compliant

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE <b>△</b>
PART No. HD1XXX-H		MEI		
DRAWING No. HD1XXX-H		HZF		
SCALE NONE		SAN		
REV.	A2	UNIT mm		
NO. REV.		REVISIONS		

<b>△</b>	A2	Modify Data	HZF	04/14/2014
<b>△</b>	A1	Modify Dim. A±0.1-->A±0.3	HZF	02/22/2011
<b>△</b>	A0	NEW RELEASE	HZF	12/09/2009
NO. REV.		REVISIONS		CHK DATE