

JRC-23F (HFD23)

SUBMINIATURE SIGNAL RELAY



File No.:E133481



File No.:CQC02001001948



Features

- Max.2A switching capability
- High sensitivity :150 mW
- 1 Form C configuration
- Sealed IP67 type available
- Environmental friendly product available (RoHS compliant)
- Outline Dimensions: 12.5 x 7.5 x 10.0 mm

CONTACT DATA

Contact arrangement	1C
Initial contact resistance Max.	100mΩ (at 1A 6VDC)
Contact material	AgNi +Au plated
Contact rating (Res. load)	0.3A 60VDC / 0.5A 125VAC / 1A 30VDC
Max. switching voltage	125VAC / 60VDC
Max. switching current	2A
Max. switching power	62.5VA / 30W
Min. permissible load	1mA 5V
Mechanical life	1x10 ⁷ ops (300ops/min.)
Electrical life	1x10 ⁵ ops (30ops/min.)

CHARACTERISTICS

Initial insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	1000VAC 1min.
	Between open contacts	400VAC 1min.
Operate time (at nomi. volt.)	Max. 5ms	
Release time (at nomi. volt.)	Max. 5ms	
Bounce time (at nomi.volt.)	Max. 5ms	
Temperature rise (at nomi.volt.)	Max. 55°C	
Shock resistance	100m/s ²	
Vibration resistance	10 to 55Hz 3.3mm	
Humidity	35 to 85% RH	
Ambient temperature	-30° C to +70° C	
Unit weight	2.2g	
Termination	PCB (DIP)	
Construction	Sealed IP67	

COIL

Coil power	Sensitive:150mW; Standard: 200mW
------------	----------------------------------

COIL DATA

Standard Type (200mW) at 20° C

Nominal Voltage (VDC)	Pick-up Voltage (VDC)	Drop-out Voltage (VDC)	Coil Current (mA)	Coil Resistance (Ω)
1.5	1.20	0.15	132.7	11.3±10%
3	2.40	0.30	66.7	45±10%
5	4.00	0.50	40.0	125±10%
6	4.80	0.60	33.3	180±10%
9	7.20	0.90	22.2	405±10%
12	9.60	1.20	16.7	720±10%
24	19.20	2.40	8.33	2880±15%

Sensitive Type (150mW) at 20° C

Nominal Voltage (VDC)	Pick-up Voltage (VDC)	Drop-out Voltage (VDC)	Coil Current (mA)	Coil Resistance (Ω)
1.5	1.20	0.15	100	15±10%
3	2.40	0.30	50.0	60±10%
5	4.00	0.50	29.9	167±10%
6	4.80	0.60	25.0	240±10%
9	7.20	0.90	16.7	540±10%
12	9.60	1.20	12.5	960±10%
24	19.20	2.40	6.25	3840±15%

Max Allowable Coil Voltage:160% Nominal Voltage at 60° C;
150% Nominal Voltage at 70° C.

SAFETY APPROVAL RATINGS


UL&CUR	1.0A 30VDC 0.3A 60VDC 0.5A 125VAC
--------	---

ORDERING INFORMATION

Type	JRC-23F / 012 1Z S XXX
Coil voltage	1.5, 3, 5, 6, 9, 12, 24VDC
Contact arrangement	1Z: 1 Form C
Coil power	S: Sensitive type (150mW) P: Standard type (200mW)
Customer special code	(Only for special requirements, e.g. 555 stands for RoHS compliant)

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

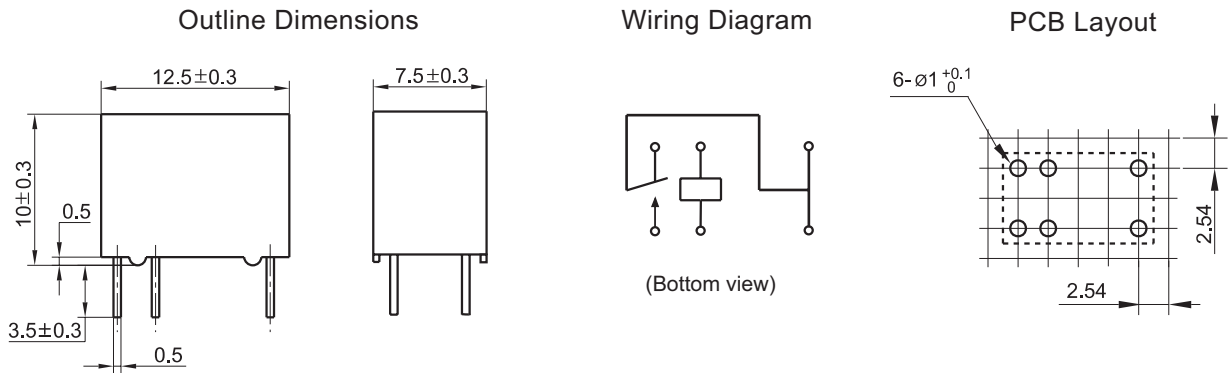

CHARACTERISTIC CURVES

