
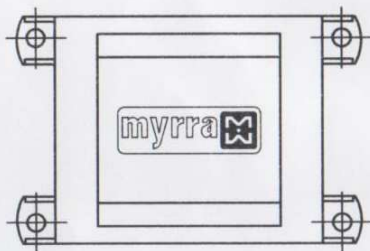
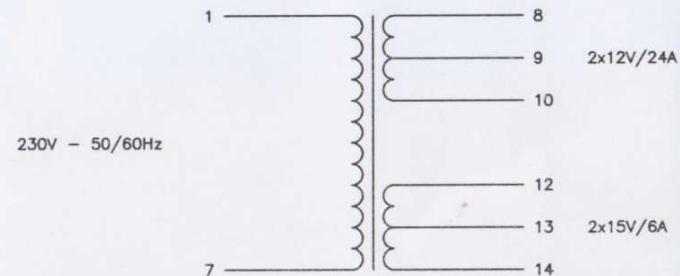



MARKING OR  
POLYESTER LABEL  
ON PINS SIDE 1-7  
MARQUAGE OU  
ETIQUETTE POLYESTER  
COTE PICOTS 1-7

ISOLATING TRANSFORMER

POWER : 30VA  
INPUT VOLTAGE : 230V  
FREQUENCY : 50/60Hz  
NOMINAL OUTPUT VOLTAGE : 2x12V/24VA  
2x15V/6VA

INHERENTLY SHORT CIRCUIT PROOF TRANSFORMER  
IP00  
UL94HB  
OPERATING TEMPERATURE : -25°C to 40°C  
STORAGE TEMPERATURE : -25°C to 85°C  
INSULATION CLASS (IEC85) : B

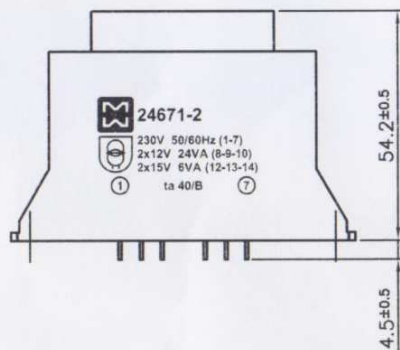

D					
C					
B					
A					
Rev	Date	Modification	Dessiné	Visa	

Finition:		Tolérance générale:	
Ech: 1:1		General tolerance:	
Matériau:			
Material:			
Dessiné par: ROUSSEL.Ch	Date: 21/03/2002	Visa: J.P.M.	
<b>PRESENTATION TRANSFORMATEUR 24671-2</b>			
<b>GENERAL DRAWING TRANSFORMER 24671-2</b>			
		407813	
<small>22 Allée du Clos des Charmes Z.A. Les Portes de la Forêt 77090 COLLEGEN Tel : 01-60-37-55-55 Fax : 01-60-17-12-00</small>			