

## SPECIFICATIONS

CUSTOMER : PTC

SAMPLE CODE (Ver.) :




MASS PRODUCTION CODE (Ver.) : PG320240WRF-MNN-HQ (VER.0)

DRAWING NO. (Ver.) : PG-03107-042 (VER.0)

**Customer Approved**

---

**Date:**

Approved	QC Confirmed	Designer
		

- Approval For Specifications Only.
- \* This specification is subject to change without notice.
- Please contact Powertip or it's representative before designing your product based on this specification.
- Approval For Specifications and Sample.

## POWERTIP TECH. CORP.

### Headquarters:

No.8, 6<sup>th</sup> Road, Taichung Industrial Park,  
 Taichung, Taiwan  
 台中市 407 工業區六路 8 號

TEL: 886-4-2355-8168  
 FAX: 886-4-2355-8166

E-mail: [sales@powertip.com.tw](mailto:sales@powertip.com.tw)  
 Http://[www.powertip.com.tw](http://www.powertip.com.tw)





## 1. SPECIFICATIONS

### 1.1 Features

Item	Standard Value
Display Type	320 * 240 Dots
LCD Type	FSTN , Positive Transflective
Driver Condition	LCD Module: 1/240 Duty, 1/14.5 Bias
Viewing Direction	6 O'clock
Backlight	White LED
Weight	180 g
Interface	4 bit parallel data input
Controller / Driver IC	OKI --- MSM6778B , MSM6779B
ROHS	THIS PRODUCT CONFORMS THE ROHS OF PTC Detail information please refer web side : <a href="http://www.powertip.com.tw/news/LatestNews.asp">http://www.powertip.com.tw/news/LatestNews.asp</a>

### 1.2 Mechanical Specifications

Item	Standard Value	Unit
Outline Dimension	167.0 (L) * 111.0 (w) * 8.0 (H)(Max)	mm
Viewing Area	120.2 (L) * 90.0 (w)	mm
Active Area	115.185 (L) * 86.385 (w)	mm
Dot Size	0.345 (L) * 0.345 (w)	mm
Dot Pitch	0.36 (L) * 0.36 (w)	mm

Note : For detailed information please refer to LCM drawing

### 1.3 Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
Power Supply Voltage	V <sub>DD</sub>	-	-0.3	+6.5	V
LCD Driver Supply Voltage	V <sub>DD</sub> -V <sub>EE</sub>	-	0	+30	V
Input Voltage	V <sub>IN</sub>	-	-0.3	V <sub>DD</sub> +0.3	V
Operating Temperature	T <sub>OP</sub>	-	-20	70	°C
Storage Temperature.	T <sub>ST</sub>	-	-30	80	°C
Storage Humidity	H <sub>D</sub>	Ta < 40	20	90	%RH

## 1.4 DC Electrical Characteristics

$V_{DD} = 2.7V - 5.5V$ ,  $V_{SS} = 0V$ ,  $T_a = 25^{\circ}C$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Logic Supply Voltage	$V_{DD}$	-	2.7	3.3	5.5	V
“H” Input Voltage	$V_{IH}$	-	$0.8 V_{DD}$	-	-	V
“L” Input Voltage	$V_{IL}$	-	-	-	$0.2 V_{DD}$	V
“H” Output Voltage	$V_{OH}$	-	$V_{DD} - 0.4$	-	-	V
“L” Output Voltage	$V_{OL}$	-	-	-	0.4	V
Supply current	$I_{DD}$	$V_{DD} = 3.3V$ , $V_{op} = 23.3V$	-	4	13	$\mu A$
	$I_{OP}$		-	3.5	12	mA
LCM driving voltage	$V_{OP}$	$V_{DD} - V_O$ ( $T_a = -20^{\circ}C$ )	23.9	24.2	24.5	V
		$V_{DD} - V_O$ ( $T_a = 25^{\circ}C$ )	23.0	23.3	23.6	
		$V_{DD} - V_O$ ( $T_a = 70^{\circ}C$ )	21.3	21.5	21.7	

## 1.5 Optical Characteristics

LCD Panel: 1/240 Duty, 1/16 Bias,  $V_{LCD} = 24.2 V$ ,  $T_a = 25^{\circ}C$


Item	Symbol	Conditions	Min.	Typ.	Max.	Reference
View Angle	$\theta$	$C \geq 2.0$ , $\varnothing = 270^{\circ}$	$-40^{\circ}$	-	$+40^{\circ}$	Note 1
Contrast Ratio	C	$\theta = -5^{\circ}$ , $\varnothing = 270^{\circ}$	2	3	-	Note 3
Response Time(rise)	tr	$\theta = -5^{\circ}$ , $\varnothing = 270^{\circ}$	-	150 ms	-	Note 2
Response Time(fall)	tf	$\theta = -5^{\circ}$ , $\varnothing = 270^{\circ}$	-	300 ms	-	



Note 1.

Optical characteristics-2

Viewing angle

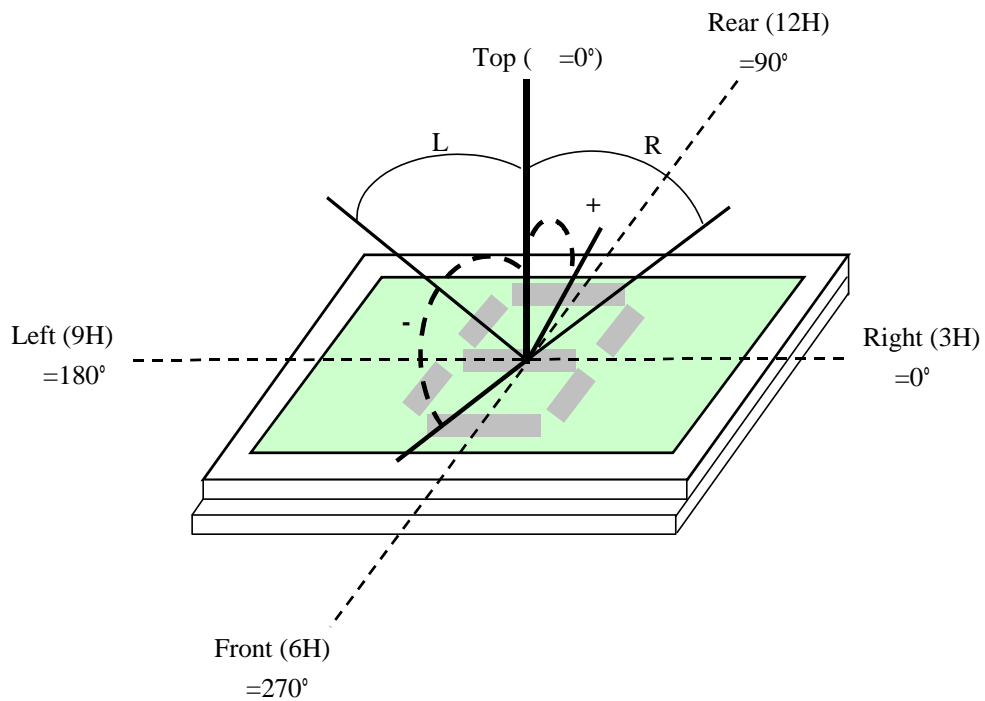


Viewing angle



Note 2.

Optical characteristics-3

Fig.2 Definition of response time

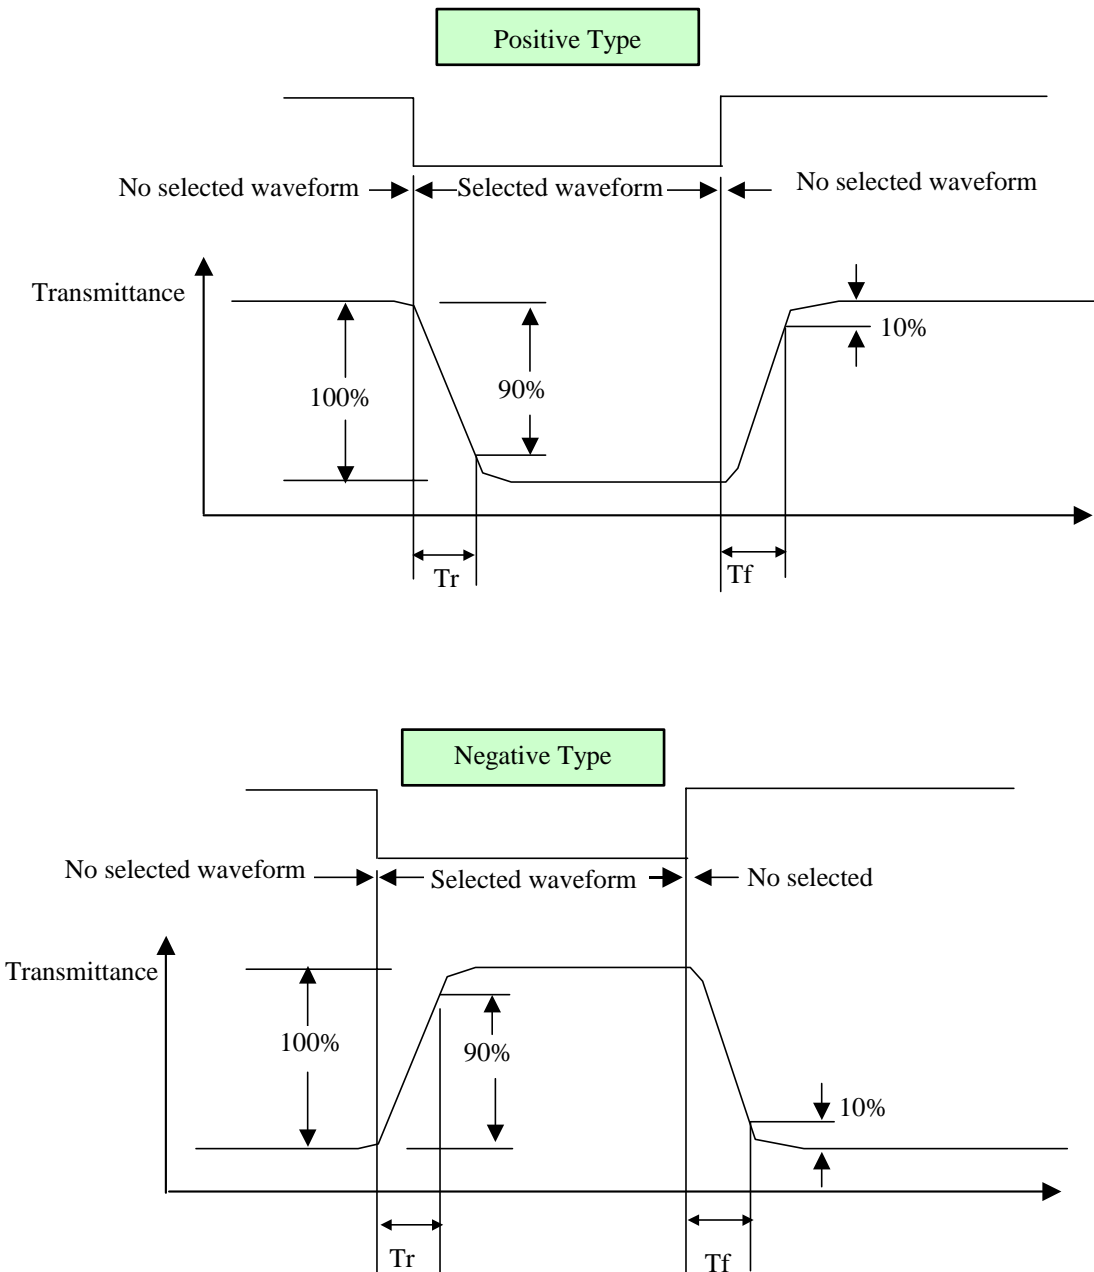




# POWER TIP

## Electrical characteristics-2


### 2 Drive waveform

$V_{op}$ : Drive voltage       $f_F$ : Frame frequency  
 $1/B$ : Bias                       $f_D$ : Drive frequency  
 $N$ : Duty

#### (1) Selected waveform

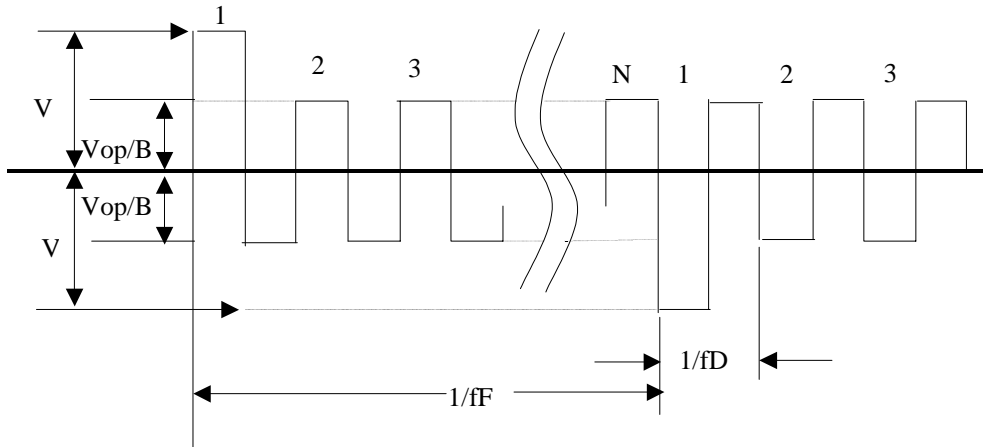

#### (2) Non- Selected waveform

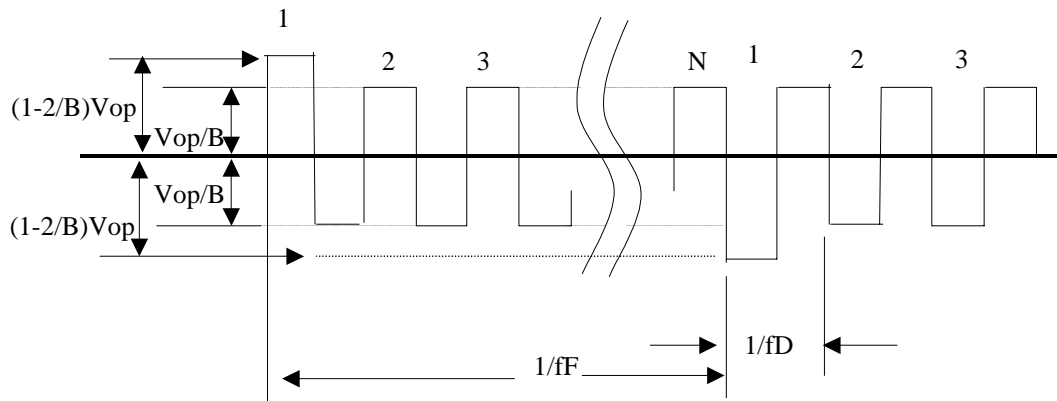


Note:

Frame frequency is defined as follows: Common side supply voltage peak - to - peak / 2 = 1 period




Note 3. : Definition of Vth

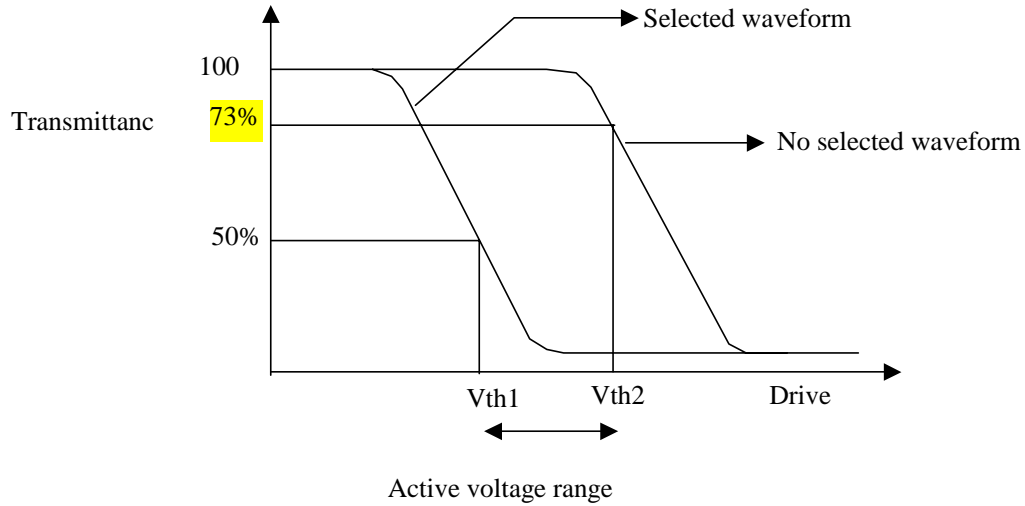

	Vth1	Vth2
View direction	10°	40°
Drive waveform	(Selected waveform)	(No selected waveform)
Transmittance	50%	73%

1 Contrast ratio  
 = (Brightness in OFF state) / (Brightness in ON state)

Outline of Electro-Optical Characteristics Measuring System

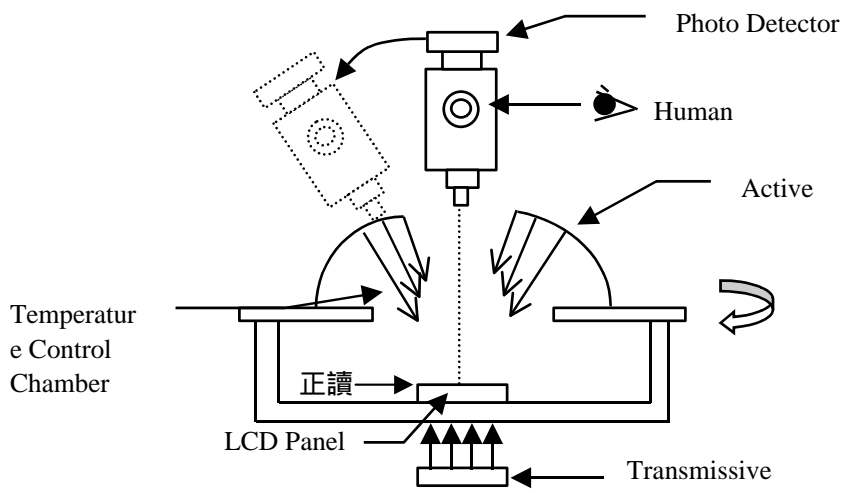

## 1.6 Backlight Characteristics

LCD Module with LED Backlight

### Maximum Ratings

Item	Symbol	Conditions	Min.	Max.	Unit
Forward Current	IF	Ta =25	-	160	mA
Reverse Voltage	VR	Ta =25	-	5	V
Power Dissipation	PO	Ta =25	-	0.67	W

### Electrical / Optical Characteristics

Ta =25

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF =160mA	-	3.7	4.2	V
Reverse Current	IR	VR = 5V	-	-	10	μA
Average Brightness (with LCD) *1	IV	IF=160mA	40	55	-	cd/m <sup>2</sup>
Uniformity (With LCD) *2	B		70	-	-	%
CIE Color Coordinate (With LCD)	X	IF=160mA	0.28	0.31	0.34	-
	Y		0.30	0.33	0.36	
Color	White					

\*1 This value will be changed while mass production.

\*2  $B=B(\text{min}) / B(\text{max}) \%$


## 2. MODULE STRUCTURE

### 2.1 Counter Drawing

#### 2.1.1 LCM Mechanical Diagram

\* See Appendix

#### 2.1.2 Block Diagram

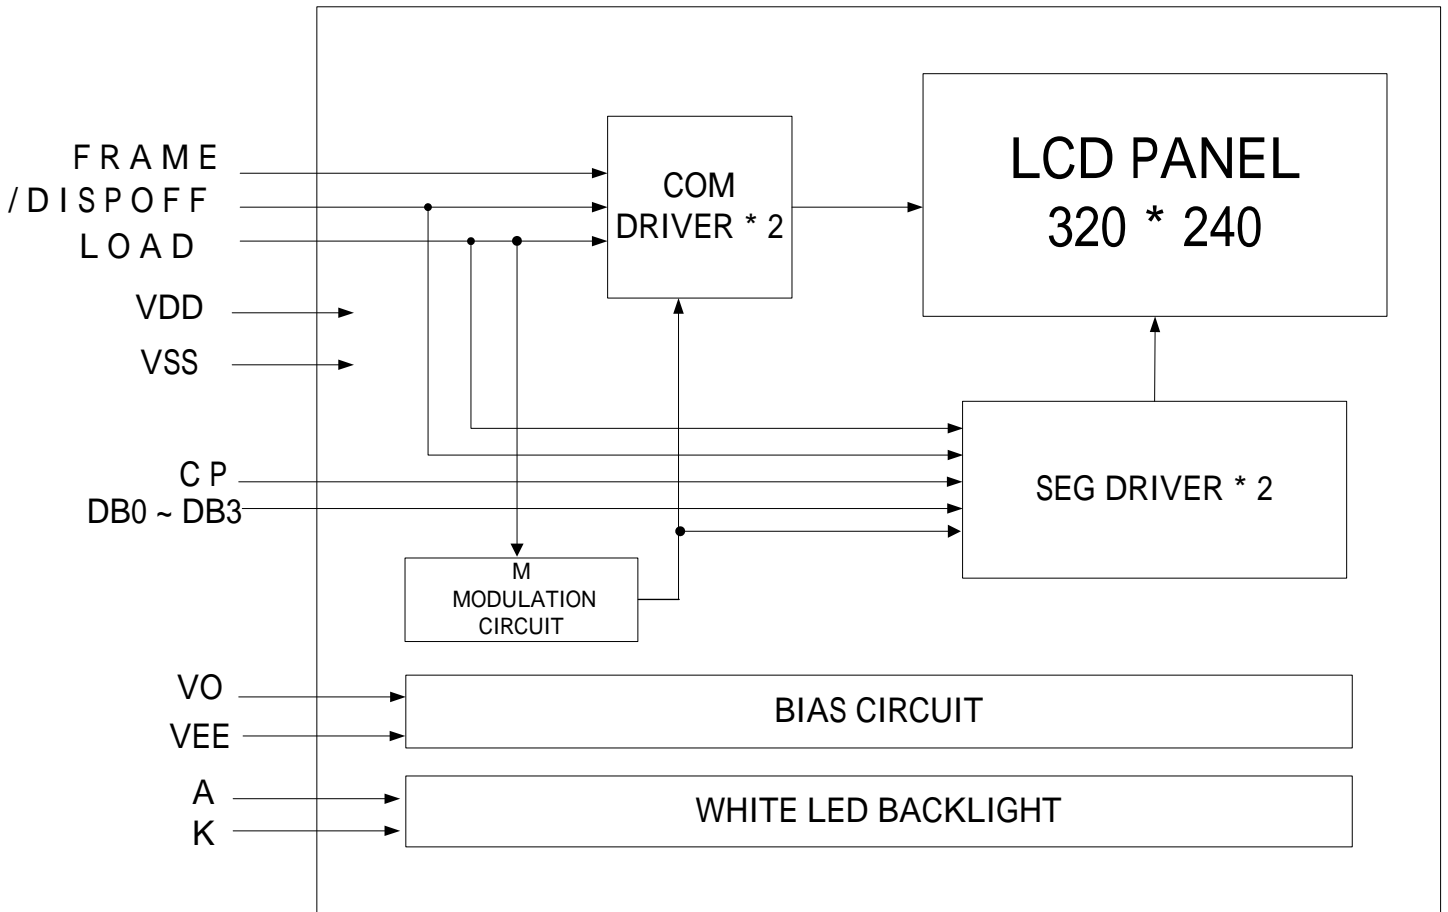


## 2.2 Interface Pin Description

PIN	SIGNAL NAME	DESCRIPTION
1	DB0	Display data input pin
2	DB1	Display data input pin
3	DB2	Display data input pin
4	DB3	Display data input pin
5	/DISPOFF	Enable Driver On (H) or Off (L)
6	FRAME	First Line Marker
7	N C	Not Connect , Must be open
8	LOAD	Input data latch signal
9	CP	Data input shift signal
10	V <sub>DD</sub>	Logic system power supply pin
11	V <sub>SS</sub>	System Ground
12	V <sub>EE</sub>	Negative Voltage
13	V <sub>O</sub>	LCD Contrast Adjust
14	V <sub>SS</sub>	System Ground

PIN	SIGNAL NAME	DESCRIPTION
	A	Power supply for LED backlight anode input
	K	Power supply for LED backlight cathode input

## 2.3 Timing Characteristics

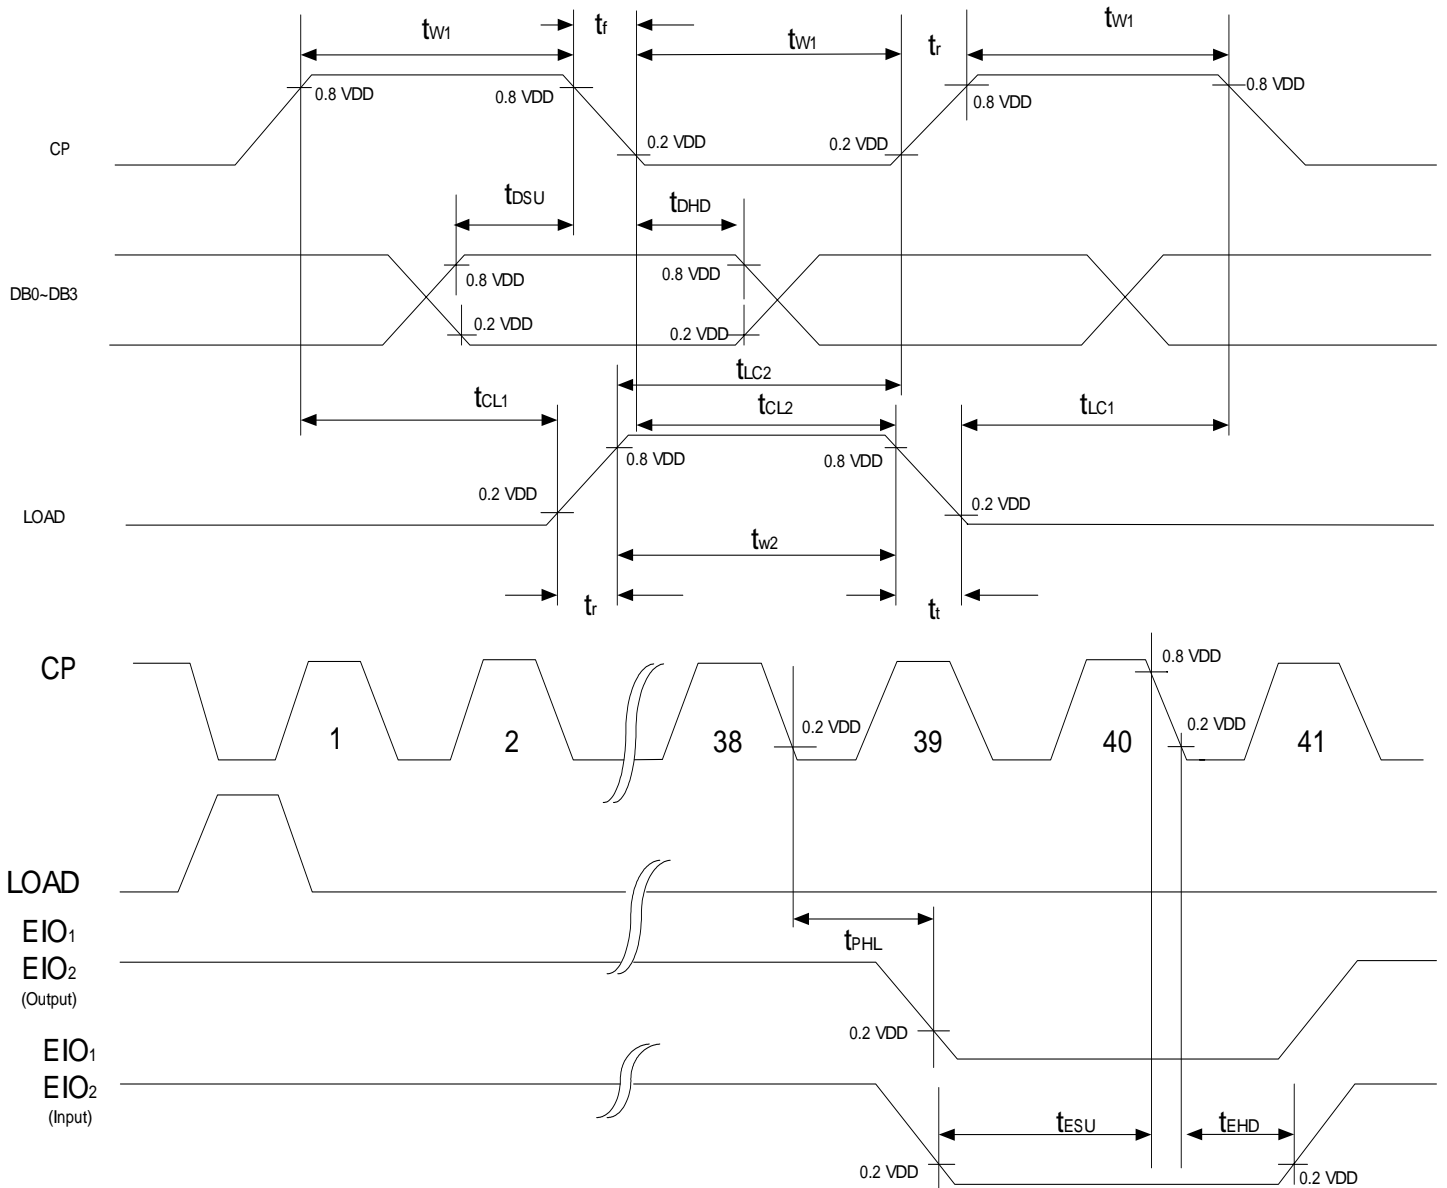


V<sub>SS</sub>=0V, V<sub>DD</sub>=2.7V to 5.5V, Ta=25°C

Parameter	Symol	Condition	Min.	Typ.	Max.	Unit
Clock Frequency	f <sub>CP</sub>	Duty=50%	-	-	6.5	MHz
Clock Pulse Width	t <sub>W1</sub>	-	56	-	-	ns
LOAD Pulse Width	t <sub>W2</sub>	-	70	-	-	ns
Clock Pulse Rise/Fall Time	t <sub>r</sub> & t <sub>f</sub>	-	-	-	20	ns
Data Setup-up Time	t <sub>DSU</sub>	-	50	-	-	ns
Data Hold time	t <sub>DHD</sub>	-	40	-	-	ns
Clock LOAD Time1	t <sub>CL1</sub>	-	0	-	-	ns
Clock LOAD Time2	t <sub>CL2</sub>	-	65	-	-	ns
LOAD Clock Time1	t <sub>LC1</sub>	-	51	-	-	ns
LOAD Clock Time2	t <sub>LC2</sub>	-	51	-	-	ns
Propagation Delay Time	t <sub>PHL</sub>	CL=15 pF	-	-	236	ns
EIO1, EIO2 Set-up Time	t <sub>ESU</sub>	-	50	-	-	ns
EIO1, EIO2 Hold Time	t <sub>EHD</sub>	-	50	-	-	Ns

Note : The above values are guaranteed when TCP is protected from light.




## 4 Bits Panel Timing

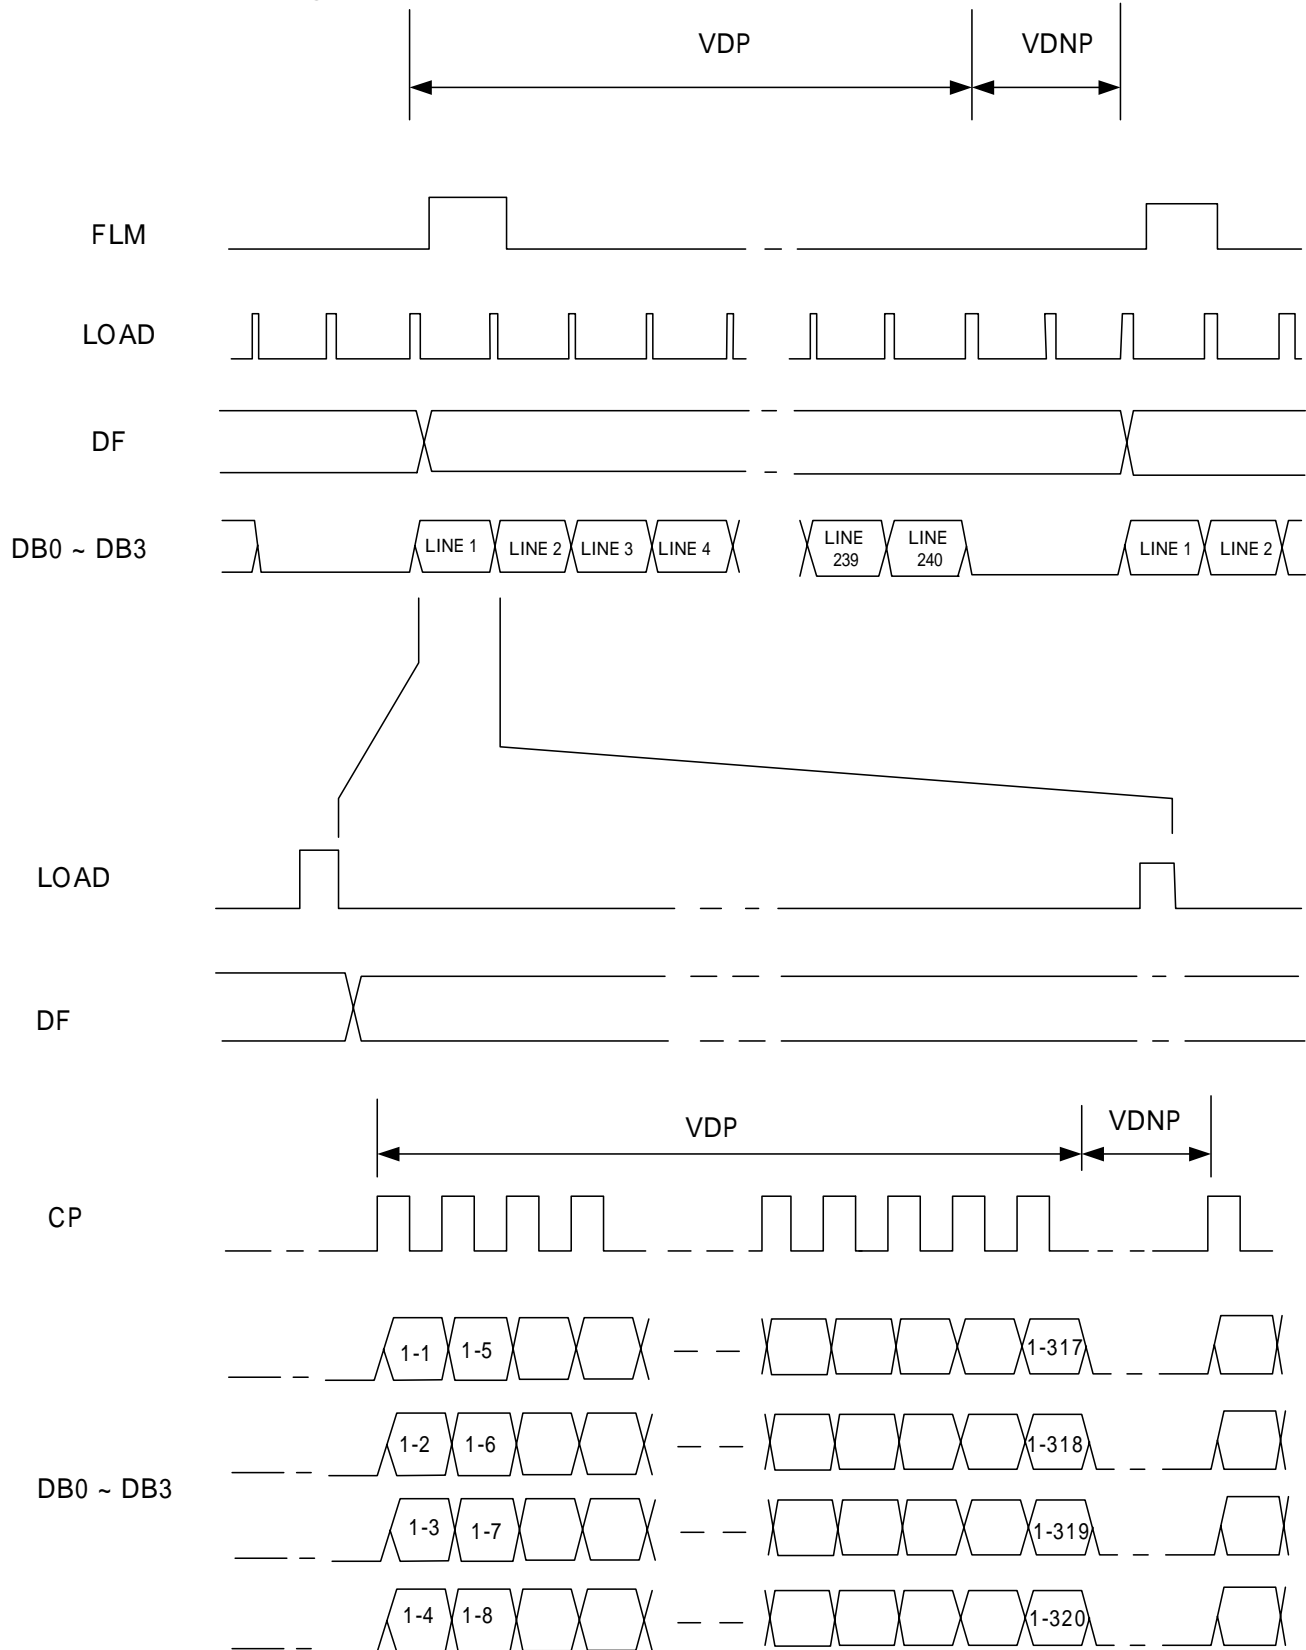



# POWER TIP


## Timing of power supply for graphic modules

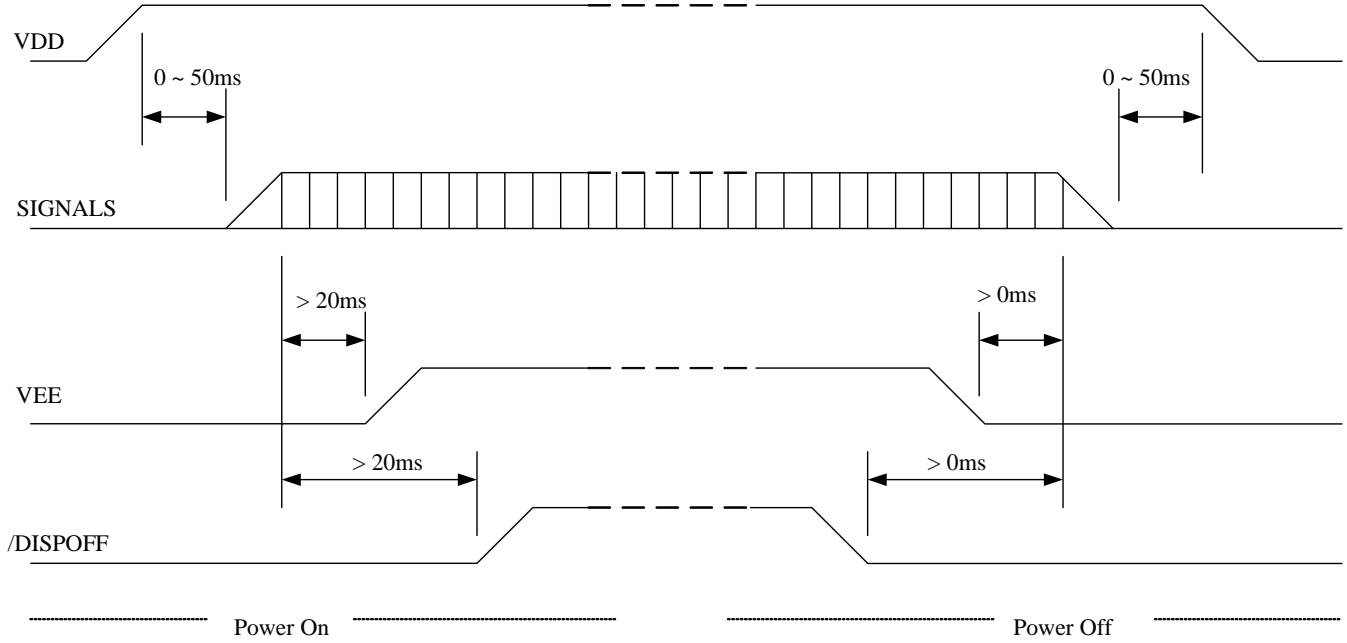



### 3. QUALITY ASSURANCE SYSTEM

#### 3.1 Quality Assurance Flow Chart

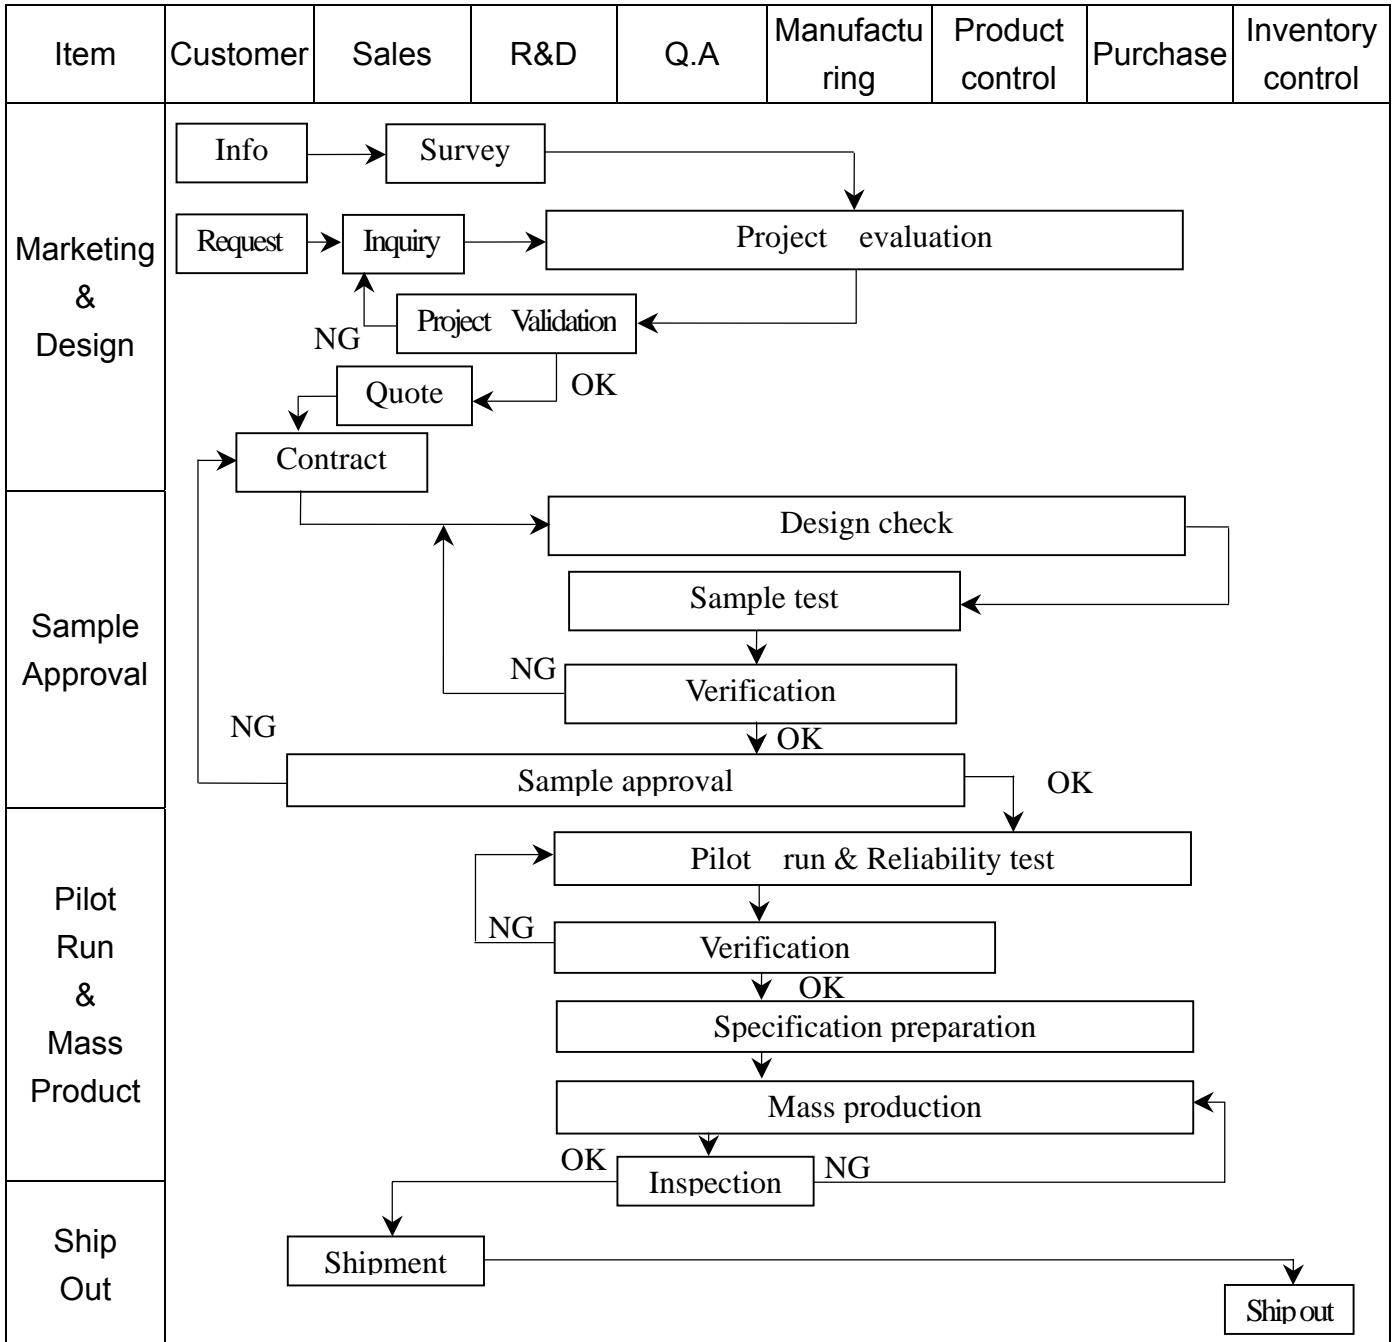



# POWER TIP

Item	Customer	Sales	R&D	Q.A	Manufacturing	Product control	Purchase	Inventory control
Sales Service	<pre> graph TD     Info[Info] --&gt; Claim[Claim]     Claim --&gt; FA[Failure analysis]     Claim --&gt; AR[Analysis report]     FA --&gt; CA[Corrective action]     CA --&gt; Tracking[Tracking]           </pre>							
Q.A Activity	1. ISO 9001 Maintenance Activities 3. Equipment calibration 5. Standardization Management				2. Process improvement proposal 4. Education And Training Activities			

### 3.2 Inspection Specification

Inspection Standard : MIL-STD-105E Table Normal Inspection Single Sampling Level

Equipment : Gauge、MIL-STD、Powertip Tester、Sample。

IQC Defect Level : Major Defect AQL 0.4; Minor Defect AQL 1.5。


FQC Defect Level : 100% Inspection。

OUT Going Defect Level : Sampling。

Specification :

NO	Item	Specification	Judge	Level
1	Part Number	The part number is inconsistent with work order of production	N.G.	Major
2	Quantity	The quantity is inconsistent with work order of production	N.G.	Major
3	Electronic characteristics of LCM $A=(L+W)\div 2$	The display lacks of some patterns.	N.G.	Major
		Missing line.	N.G.	Major
		The size of missing dot, A is $> 1/2$ Dot size	N.G.	Major
		There is no function.	N.G.	Major
		Output data is error	N.G.	Major
4	Appearance of LCD $A=(L+W)\div 2$	Material is different with work order of production	N.G.	Major
		LCD is assembled in inverse direction	N.G.	Major
		Bezel is assembled in inverse direction	N.G.	Major
		Shadow is within LCD viewing area + 0.5 mm	N.G.	Major
		The diameter of dirty particle, A is $> 0.4$ mm	N.G.	Minor
	Dirty particle (Including scratch、bubble)	Dirty particle length is $> 3.0$ mm, and $0.01$ mm $<$ width $0.05$ mm	N.G.	Minor
		Display is without protective film	N.G.	Minor
		Conductive rubber is over bezel 1mm	N.G.	Minor
		Polarizer exceeds over viewing area of LCD	N.G.	Minor
		Area of bubble in polarizer, A $> 1.0$ mm, the number of bubble is $> 1$ piece.	N.G.	Minor
5	Appearance of PCB $A=(L+W)\div 2$	$0.4$ mm $<$ Area of bubble in polarizer, A $< 1.0$ mm, the number of bubble is $> 4$ pieces.	N.G.	Minor
		Burned area or wrong part number is on PCB	N.G.	Major
		The symbol, character, and mark of PCB are unidentifiable.	N.G.	Minor
		The stripped solder mask , A is $> 1.0$ mm	N.G.	Minor
		$0.3$ mm $<$ stripped solder mask or visible circuit, A $< 1.0$ mm, and the number is 4 pieces	N.G.	Minor
		There is particle between the circuits in solder mask	N.G.	Minor
		The circuit is peeled off or cracked	N.G.	Minor
		There is any circuits risen or exposed.	N.G.	Minor
$0.2$ mm $<$ Area of solder ball, A is $0.4$ mm	N.G.	Minor		
The number of solder ball is 3 pieces	N.G.	Minor		
The magnitude of solder ball, A is $> 0.4$ mm.	N.G.	Minor		

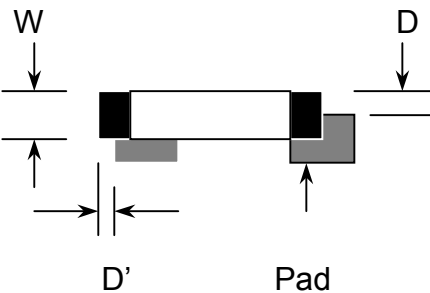

NO	Item	Specification	Judge	Level
6	Appearance of molding $A = (L + W) \div 2$	The shape of modeling is deformed by touching.	N.G.	Major
		Insufficient epoxy: Circuit or pad of IC is visible	N.G.	Minor
		Excessive epoxy: Diameter of modeling is $> 20\text{mm}$ or height is $> 2.5\text{mm}$	N.G.	Minor
		The diameter of pinhole in modeling, A is $> 0.2\text{mm}$ .	N.G.	Minor
7	Appearance of frame $A = (L + W) \div 2$	The folding angle of frame must be $> 45^\circ + 10^\circ$	N.G.	Minor
		The area of stripped electroplate in top-view of frame, A is $> 1.0\text{mm}$ .	N.G.	Minor
		Rust or crack is (Top view only)	N.G.	Minor
		The scratched width of frame is $> 0.06\text{mm}$ . (Top view only)	N.G.	Minor
8	Electrical characteristic of backlight $A = (L + W) \div 2$	The color of backlight is nonconforming	N.G.	Major
		Backlight can't work normally.	N.G.	Major
		The LED lamp can't work normally	N.G.	Major
		The unsoldering area of pin for backlight, A is $> 1/2$ solder joint area.	N.G.	Minor
		The height of solder pin for backlight is $> 2.0\text{mm}$	N.G.	Minor
10	Assembly parts $A = (L + W) \div 2$	The mark or polarity of component is unidentifiable.	N.G.	Minor
		The height between bottom of component and surface of the PCB is floating $> 0.7\text{mm}$	N.G.	Minor
		$D > 1/4W$  <p>The diagram illustrates a component with width <math>W</math> and a pad with width <math>D</math>. The end solder joint width is labeled <math>D'</math>. The component is shown with a black body and a grey pad. Arrows indicate the dimensions <math>W</math>, <math>D</math>, and <math>D'</math>.</p>	N.G.	Minor
		End solder joint width, $D'$ is $> 50\%$ width of component termination or width of pad	N.G.	Minor
		Side overhang, $D$ is $> 25\%$ width of component termination.	N.G.	Minor
		Component is cracked, deformed, and burned, etc.	N.G.	Minor
		The polarity of component is placed in inverse direction.	N.G.	Minor
		Maximum fillet height of solder extends onto the component body or minimum fillet height is $< 0.5\text{mm}$ .	N.G.	Minor

## 4. RELIABILITY TEST

### 4.1 Reliability Test Condition

NO	Item	Test Condition	
1	High Temperature Storage	Storage at 80 ±2 96~100 hrs Surrounding temperature, then storage at normal condition 4hrs	
2	Low Temperature Storage	Storage at -30 ±2 96~100 hrs Surrounding temperature, then storage at normal condition 4hrs	
3	High Temperature /Humidity Storage	1.Storage 96~100 hrs 60±2 , 90~95%RH surrounding temperature, then storage at normal condition 4hrs. (Excluding the polarizer). or 2.Storage 96~100 hrs 40±2 , 90~95%RH surrounding temperature, then storage at normal condition 4 hrs.	
4	Temperature Cycling	<div style="text-align: center;"> <math display="block">\begin{matrix} -20 &amp; 25 &amp; 70 &amp; 25 \\ \leftarrow (30mins) &amp; (5mins) &amp; (30mins) &amp; (5mins) \rightarrow \\ &amp; \underbrace{\hspace{10em}} &amp; &amp; \\ &amp; 10 \text{ Cycle} &amp; &amp; \end{matrix}</math> </div>	
5	Vibration	10~55Hz ( 1 minute ) 1.5mm X,Y and Z direction * (each 2hrs)	
6	ESD Test	Air Discharge: Apply 6 KV with 5 times discharge for each polarity +/-	Contact Discharge: Apply 250V with 5 times discharge for each polarity +/-
		Testing location: Around the face of LCD	Testing location: 1.Apply to bezel. 2.Apply to Vdd, Vss.
7	Drop Test	Packing Weight (Kg)	Drop Height (cm)
		0 ~ 45.4	122
		45.4 ~ 90.8	76
		90.8 ~ 454	61
		Over 454	46

## **5. PRECAUTION RELATING PRODUCT HANDLING**

### **5.1 SAFETY**

- 5.1.1 If the LCD panel breaks , be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes , please wash it off immediately by using soap and water.

### **5.2 HANDLING**


- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module , be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So , please handle it very carefully ,do not touch , push or rub the exposed polarizing with anything harder than an HB pencil lead (glass , tweezers , etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth , as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands , this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.

### **5.3 STORAGE**

- 5.3.1 Store the panel or module in a dark place where the temperature is 25 ±5 and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush , shake , or jolt the module.

### **5.4 TERMS OF WARRANTY**

- 5.4.1 Applicable warrant period  
The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility  
This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment , we cannot take responsibility if the product is used in nuclear power control equipment , aerospace equipment , fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.

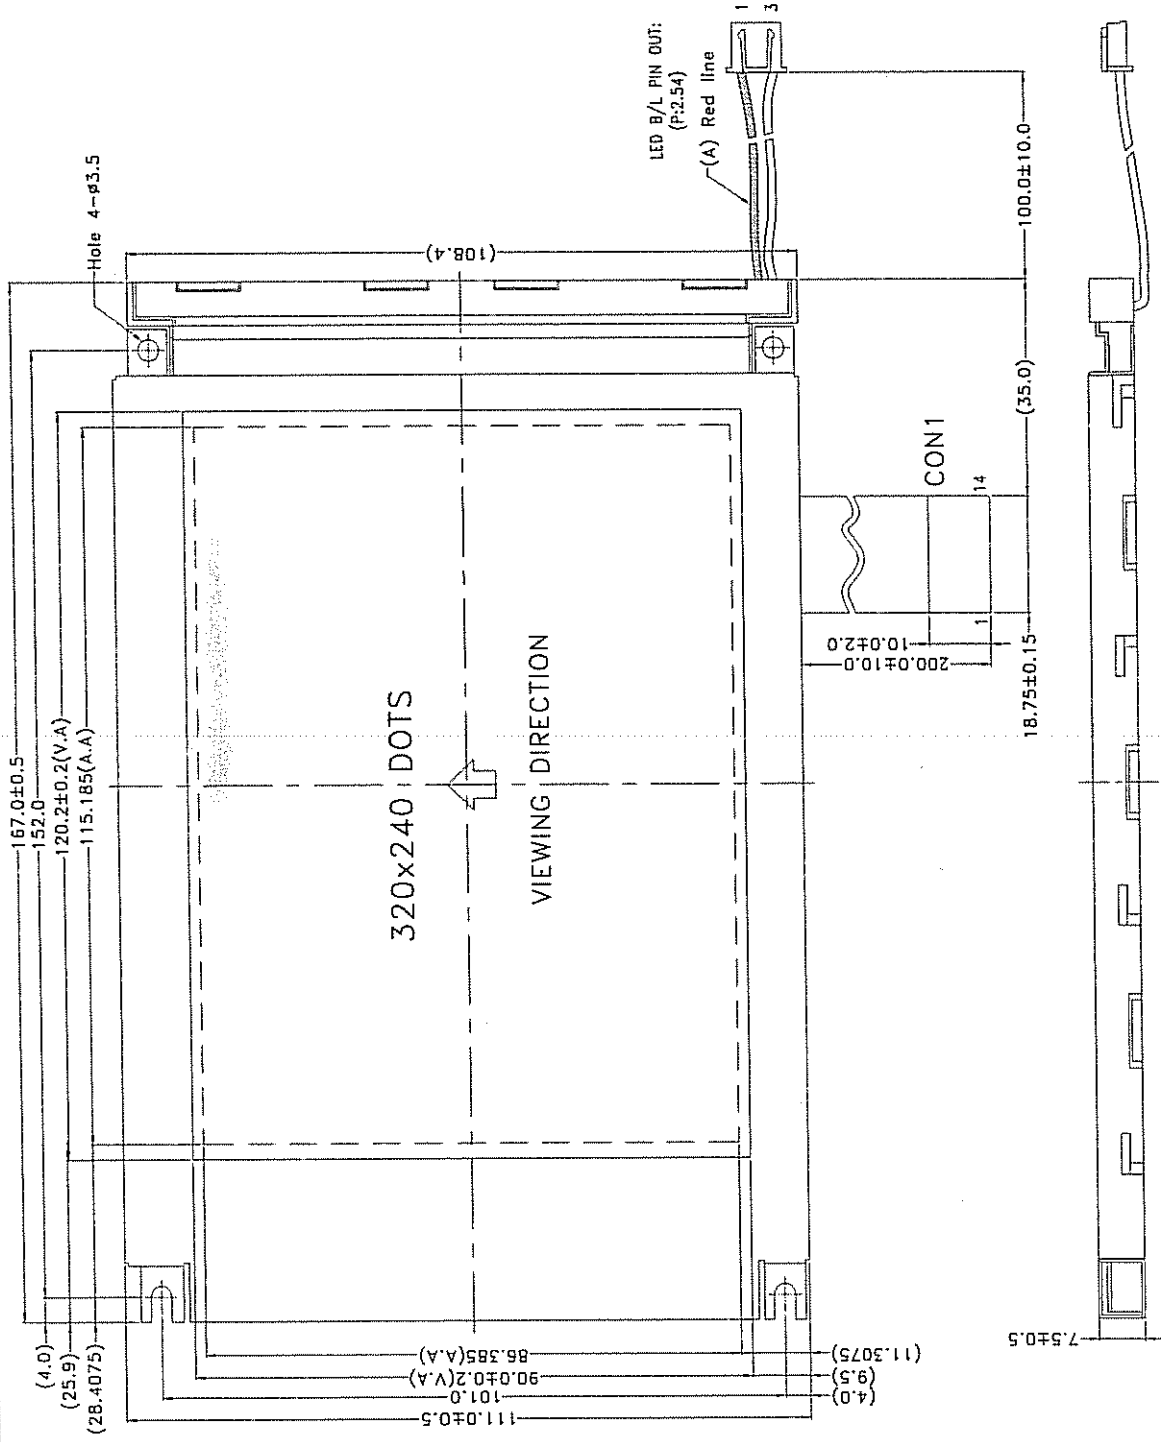

0.345	0.015	0.015	0.345

Dots detail  
Scale:20/1

- Note:  
 1.The tolerance unless classified ±0.3mm  
 2.LCD type:FSTN  
 3.LCD mode: Positive / Transflective  
 4.View direction: 6 o'clock  
 5.T<sub>op</sub>=-20℃~70℃, T<sub>W</sub>=-30℃~80℃  
 6.α=PI.25x13=16.25±0.15

久正光電股份有限公司  
 POWER TIP TECHNOLOGY CORPORATION

SCALE: 4/5	UNIT: mm	PAGE: 1/1	APPROVED	CHECKER	DRAWN
圖面名稱	PG320240WRF-MNN-HQ	95.4.13	研發	研發	研發
圖面編號	PG-03107-042	EDI 0	張慶源	賴銘信	郭政玲

REV	DESCRIPTION	DATE

LCM Model PG320240WRF-MNN-HQ  
 版次 Ver.0

# LCM包裝規格書

## LCM Packaging Specifications

Approve	Check	Contact
研發 95.4.13 張慶源	研發 95.4.13 賴銘信	研發 95.4.13 郭政玲


### 1. 包裝材料規格表 (Packaging Material) : (per carton)

No.	Item	Model	Dimensions (mm)	Quantity
1	成品 (LCM)	PG320240WRF-MNN-HQ	167.0 X 111.0	28
2	靜電袋(1)	BAG240170ARABA	240 X 170	28
3	氣泡袋(2)	BAG170150AWBBA	170 X 150	28
4	A6隔板(3)	BX33800012BZBA	338 X 125 X 3	16
5	B6隔板(4)	BX29800012BZBA	293 X 125 X 3	4
6	海綿墊(5)	OTFOAM00005ABA	330 X 290 X 10	4
7	C4內盒(6)Product Box	BX36031014AABA	360 X 310 X 142	2
8	外紙箱(7)Carton	BX39432432CCBA	394 X 324 X 321	1
9				

### 2. 單箱數量規格表 (Packaging Specifications and Quantity) :

(1) Quantity Of Spacer : A6隔板 X 8 , B6隔板 X 2

(2) Total LCM quantity in carton : quantity per box 14 x no of boxes 2 = 28

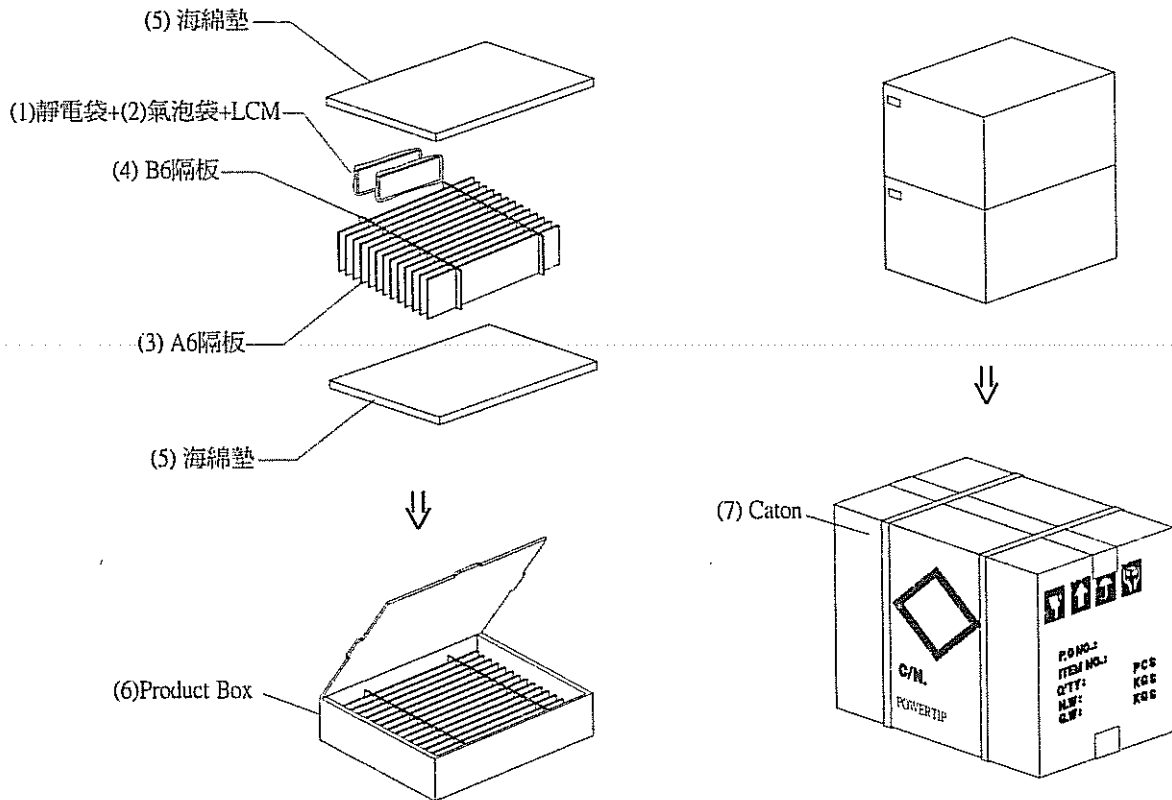


### 特 記 事 項 (REMARK)

#### 1. Label Specifications :

MODEL:  
 LOT NO:  
 QUANTITY:  
 CHECK:

1. 每個間隔放2片模組，前後間隔不放置模組。(如示意圖)

#### 放置格示意圖:



1. [Shaded Box] 模組 X 2pcs. 2. [White Box] 空格